

SNQ3NN/...11DB

SKUPINA 3

Technické dáta





		Vel'kosť									
		022	026	033	038	044	048	055	063	075	090
Objem	ccm	22,1	26,2	33,1	27,9	44,1	48,3	55,1	63,4	74,4	88,2
Maximálny tlak	bar	270	270	270	270	270	250	250	230	200	170
Menovitý tlak		250	250	250	250	250	230	230	210	180	150
Maximálne otáčky	min-1	3000	3000	3000	3000	3000	3000	2500	2500	2500	2500
Hmotnosť	kg	6,80	6,80	7,20	7,30	7,50	7,60	7,80	8,10	8,50	8,90
Prietok pri 1400 ot/min	l/min	27,85	33,01	41,71	47,75	55,57	60,86	69,43	79,88	93,74	111,13
Teoretický prietok pri max otáčkach	l/min	66,30	78,60	99,30	113,70	132,30	111,90	137,80	158,50	186,00	220,50

Montážna príručka

Hriadel'

11		D50,8mm+4otvory (98,4x128,1)SC11	DB		DIN 5482 B17X14-L14 SC02
----	---	-------------------------------------	----	--	--------------------------

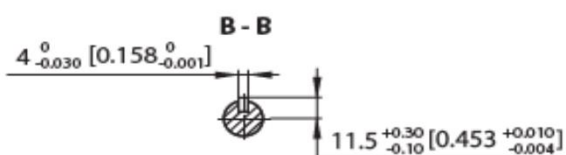
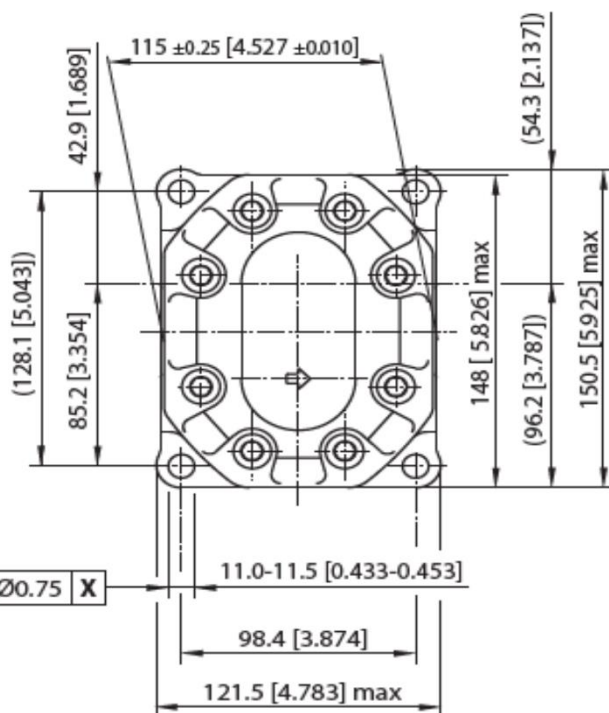
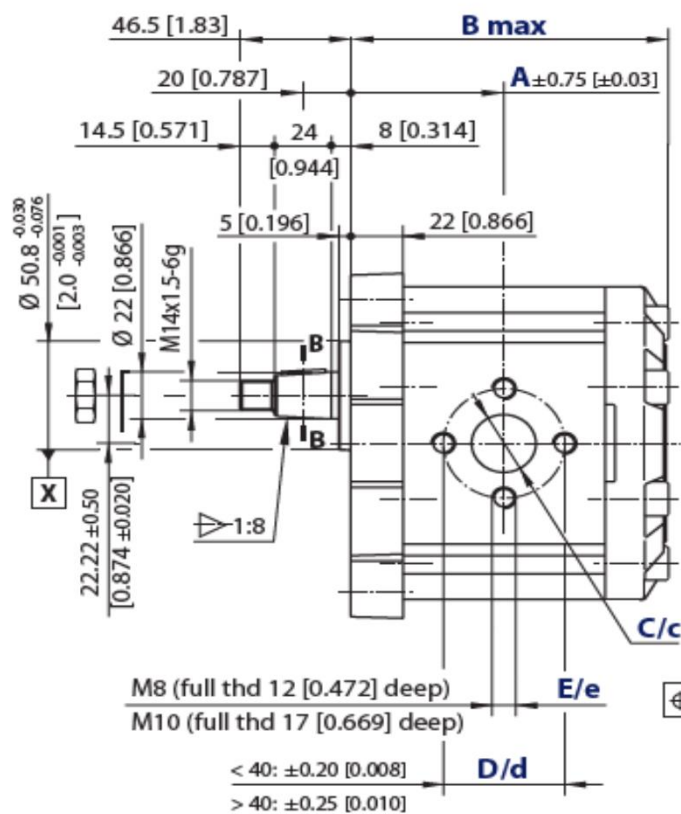
Porty

Sanie			Výtlak		
C3		13,5x30xM6	C3		13,5x30xM6
CA		27x51xM10	C7		20X40XM8
Sanie			Výtlak		

F6		BSP 1 GAS				F6		BSP 1 GAS			
		022	026	033	038	044	048	055	063	075	090
	A	63,00	64,50	67,00	68,80	71,00	72,50	75,00	78,00	82,00	87,00
	B	132,50	135,50	140,50	144,00	148,50	151,50	156,50	162,50	170,50	180,50

mm
[in]

01BA



Hireco
TECHNIK