

## SNP3NN/...01BA

### SKUPINA 3

#### Technické dáta

		Veľkosť									
		022	026	033	038	044	048	055	063	075	090
Objem	ccm	22,1	26,2	33,1	27,9	44,1	48,3	55,1	63,4	74,4	88,2
Maximálny tlak	bar	270	270	270	270	270	250	250	230	200	170
Menovitý tlak		250	250	250	250	250	230	230	210	180	150
Maximálne otáčky	min-1	3000	3000	3000	3000	3000	3000	2500	2500	2500	2500
Hmotnosť	kg	6,80	6,80	7,20	7,30	7,50	7,60	7,80	8,10	8,50	8,90
Prietok pri 1400 ot/min	l/min	27,85	33,01	41,71	47,75	55,57	60,86	69,43	79,88	93,74	111,13
Teoretický prietok pri max otáčkach	l/min	66,30	78,60	99,30	113,70	132,30	111,90	137,80	158,50	186,00	220,50



#### Montážna príručka

#### Hriadel'

<b>01BA</b>	pilot Ø 50.8 mm [2.0 in] European 01, 4-bolt		1:8 tapered		European flanged port + pattern	
-------------	---	---	-------------	--	---------------------------------	---


#### Sanie

#### Výtlak

F6		BSP 1 GAS	F5		BSP 3/4 GAS
----	---	-----------	----	--	-------------

#### Rozmery

	022	026	033	038	044	048	055	063	075	090
A	63,00	64,50	67,00	68,80	71,00	72,50	75,00	78,00	82,00	87,00
B	132,50	135,50	140,50	144,00	148,50	151,50	156,50	162,50	170,50	180,50

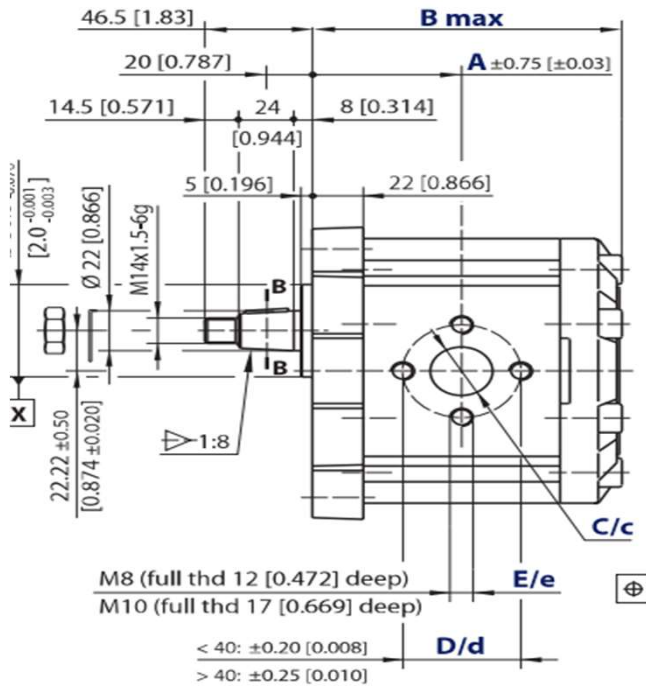

**Hireco**  
TECHNIK

Member of the Danfoss Group  
**TUROLLA** ▶▶  
 fast forward thinking

