

SNO2NN/03CH


SKUPINA 2

Technické dáta





		Veľkosť						
		4,0	6,0	8,0	011	014	017	019
Objem	ccm	3,9	6,0	8,4	10,8	14,4	16,8	19,2
Maximálny tlak	bar	280	280	280	280	280	280	230
Menovitý tlak		250	250	250	250	250	250	210
Maximálne otáčky	min-1	4000	4000	4000	4000	3500	3000	3000
Hmotnosť	kg	2,30	2,40	2,50	2,70	2,90	3,00	3,10
Prietok pri 1400 ot/min	l/min	4,91	7,56	10,58	13,61	18,14	21,17	24,19
Teoretický prietok pri max otáčkach	l/min	15,60	24,00	33,60	43,20	50,40	53,40	57,60

Montážna príruka

Hriadel'

03		Príruba zaedenie D52+O-ring+4 otvory pre skrutky cez teleso	CH		Unašac 8x17,8xL6,5+rear Unašac 8x17,46xL6,5 typ 43
----	---	---	----	--	---

Porty

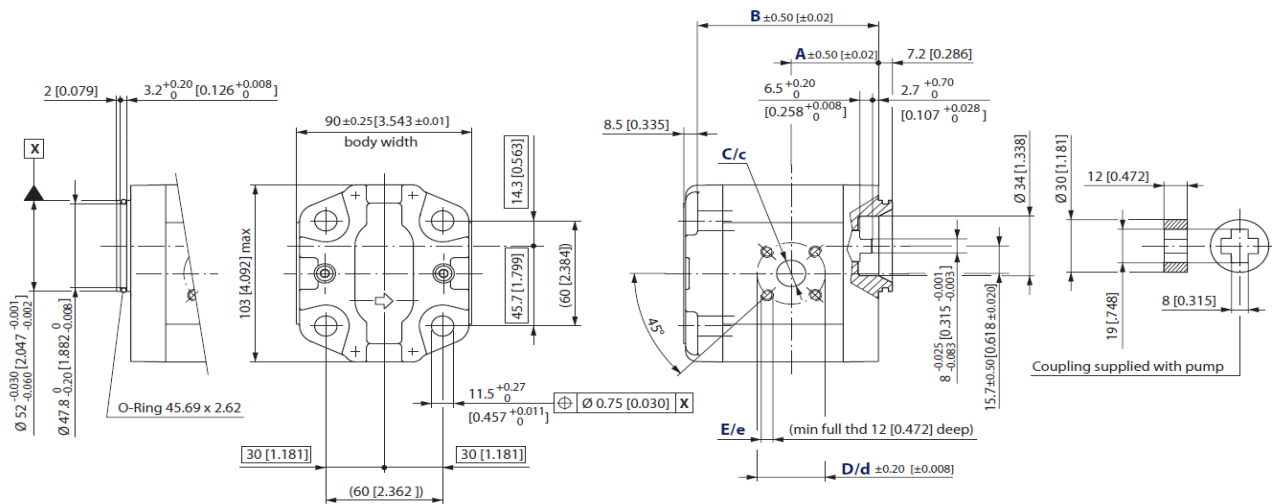
Sanie			Výtlak		
C3		13,5x30xM6	C3		13,5x30xM6
C7		20x40xM8	C3		13,5x30xM6

Rozmery

	4,0	6,0	8,0	011	014	017	019
A	43,25	45,00	45,00	49,00	52,00	52,00	56,00

B	110,00	113,50	117,50	121,50	127,50	131,50	135,50
---	--------	--------	--------	--------	--------	--------	--------

mm [in]



Hireco
TECHNIK