

SNP2NN/...06SA





SKUPINA 2

Technické dáta







		Veľkosť								
		4,0	6,0	8,0	011	014	017	019	022	025
Objem	ccm	3,9	6,0	8,4	10,8	14,4	16,8	19,2	22,8	25,2
Maximálny tlak	bar	280	280	280	280	280	280	230	200	175
Menovitý tlak		250	250	250	250	250	250	210	180	160
Maximálne otáčky	min-1	4000	4000	4000	4000	3500	3000	3000	3000	3000
Hmotnosť	kg	2,30	2,40	2,50	2,70	2,90	3,00	3,10	3,20	3,30
Prietok pri 1400 ot/min	l/min	4,91	7,56	10,58	13,61	18,14	21,17	24,19	28,73	31,75
Teoretický prietok pri max otáčkach	l/min	15,60	24,00	33,60	43,20	50,40	53,40	57,60	68,40	75,60

Montážna príruha

Hriadel'

06		SAE A pilot Ø 82,55 + 2 otvory	SA		Drážkovaný hriadel' SAE J498-9T-16/32
A6		SAE A pilot Ø 82,55 + 2 otvory + tesnenie	SA		Drážkovaný hriadel' SAE J498-9T-16/32

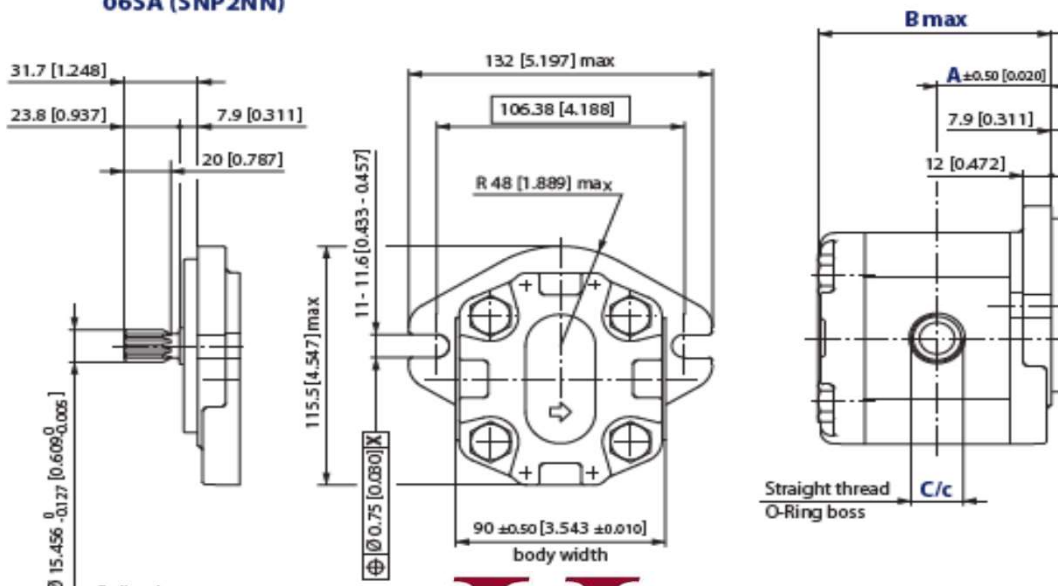
Porty

Sanie			Výtlak		
C3		13,5x30xM6	C3		13,5x30xM6
C7		20x40xM8	C3		13,5x30xM6
C8		23,5x40xM8	C7		20x40xM8

Rozmery

	4,0	6,0	8,0	011	014	017	019	022	025
A	43,25	45,00	45,00	49,00	52,00	52,00	56,00	59,00	59,00
B	90,00	93,50	97,50	101,50	107,50	111,50	115,50	121,50	125,50

06SA (SNP2NN)



Splined:
SAE J498-9T-16/32DP
Flat root side fit
(circular tooth thickness
0.127 mm [0.005] less than
standard class 1 fit)

Hireco
TECHNIK