

SNP2NN/...06SA





SKUPINA 2

Technické dáta



		Veľkosť								
		4,0	6,0	8,0	011	014	017	019	022	025
Objem	ccm	3,9	6,0	8,4	10,8	14,4	16,8	19,2	22,8	25,2
Maximálny tlak	bar	280	280	280	280	280	280	230	200	175
Menovitý tlak		250	250	250	250	250	250	210	180	160
Maximálne otáčky	min-1	4000	4000	4000	4000	3500	3000	3000	3000	3000
Hmotnosť	kg	2,30	2,40	2,50	2,70	2,90	3,00	3,10	3,20	3,30
Prietok pri 1400 ot/min	l/min	4,91	7,56	10,58	13,61	18,14	21,17	24,19	28,73	31,75
Teoretický prietok pri max otáčkach	l/min	15,60	24,00	33,60	43,20	50,40	53,40	57,60	68,40	75,60



Montážna príruža

Hriadel'

06		SAE A pilot Ø 82,55 + 2 otvory	SA		Drážkovaný hriadel' SAE J498-9T-16/32
A6		SAE A pilot Ø 82,55 + 2 otvory + tesnenie	SA		Drážkovaný hriadel' SAE J498-9T-16/32

Porty

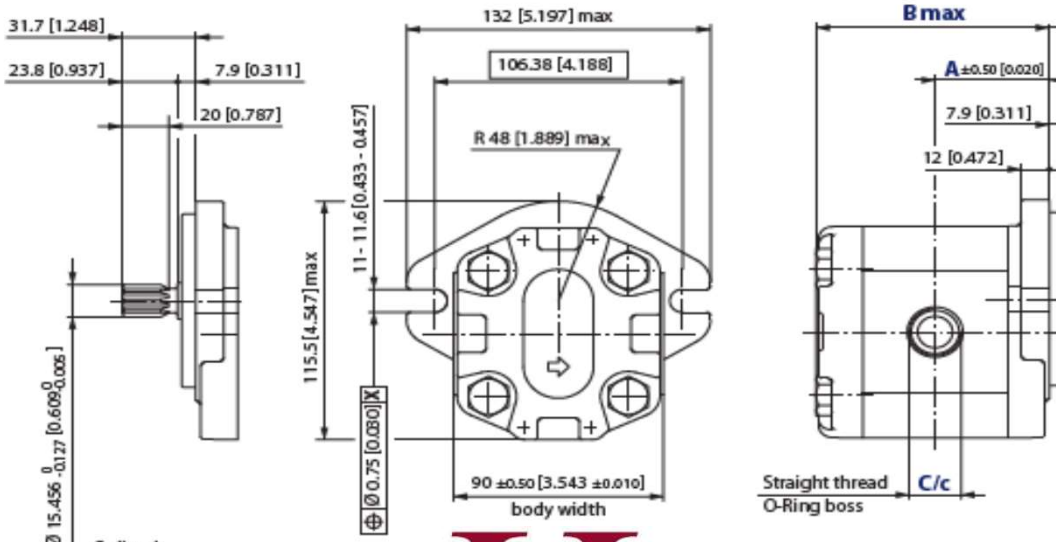
Sanie		Výtlak		
F5		3/4 GAS	F4 	1/2 GAS

F4		1/2 GAS	F3		3/8 GAS
----	--	---------	----	---	---------

Rozměry

	4,0	6,0	8,0	011	014	017	019	022	025
A	43,25	45,00	45,00	49,00	52,00	52,00	56,00	59,00	59,00
B	90,00	93,50	97,50	101,50	107,50	111,50	115,50	121,50	125,50

06SA (SNP2NN)



Splined:
SAE J496-9T-16/32DP
Flat root side fit
(circular tooth thickness
0.127 mm [0.005] less than
standard class 1 fit)

Hireco
TECHNIK