

SNP2NN/...06GA



SKUPINA 2

Technické dáta



		Veľkosť								
		4,0	6,0	8,0	011	014	017	019	022	025
Objem	ccm	3,9	6,0	8,4	10,8	14,4	16,8	19,2	22,8	25,2
Maximálny tlak	bar	280	280	280	280	280	280	230	200	175
Menovitý tlak		250	250	250	250	250	250	210	180	160
Maximálne otáčky	min-1	4000	4000	4000	4000	3500	3000	3000	3000	3000
Hmotnosť	kg	2,30	2,40	2,50	2,70	2,90	3,00	3,10	3,20	3,30
Prietok pri 1400 ot/min	l/min	4,91	7,56	10,58	13,61	18,14	21,17	24,19	28,73	31,75
Teoretický prietok pri max otáčkach	l/min	15,60	24,00	33,60	43,20	50,40	53,40	57,60	68,40	75,60

Montážna príruha

Hriadel'

06		SAE A pilot Ø 82,55 + 2 otvory	GA		Valec SAE D15,875-L23,8-Pero 4x18 CI06
----	---	--------------------------------	----	--	--

Porty

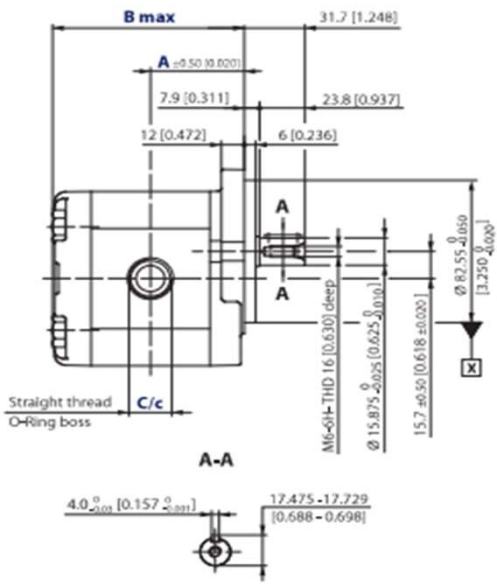
Sanie		Výtlak			
E6		1-1/16-12UN	E5		7/8-14UNF

Rozmery

	4,0	6,0	8,0	011	014	017	019	022	025
A	43,25	45,00	45,00	49,00	52,00	52,00	56,00	59,00	59,00
B	90,00	93,50	97,50	101,50	107,50	111,50	115,50	121,50	125,50

mm [in]

06GA



Hireco
TECHNIK