

SNP2NN/...03CA



SKUPINA 2

Technické dáta





		Veľkosť								
		4,0	6,0	8,0	011	014	017	019	022	025
Objem	ccm	3,9	6,0	8,4	10,8	14,4	16,8	19,2	22,8	25,2
Maximálny tlak	bar	280	280	280	280	280	280	230	200	175
Menovitý tlak		250	250	250	250	250	250	210	180	160
Maximálne otáčky	min-1	4000	4000	4000	4000	3500	3000	3000	3000	3000
Hmotnosť	kg	2,30	2,40	2,50	2,70	2,90	3,00	3,10	3,20	3,30
Prietok pri 1400 ot/min	l/min	4,91	7,56	10,58	13,61	18,14	21,17	24,19	28,73	31,75
Teoretický prietok pri max otáčkach	l/min	15,60	24,00	33,60	43,20	50,40	53,40	57,60	68,40	75,60

Montážna príruka

Hriadel'

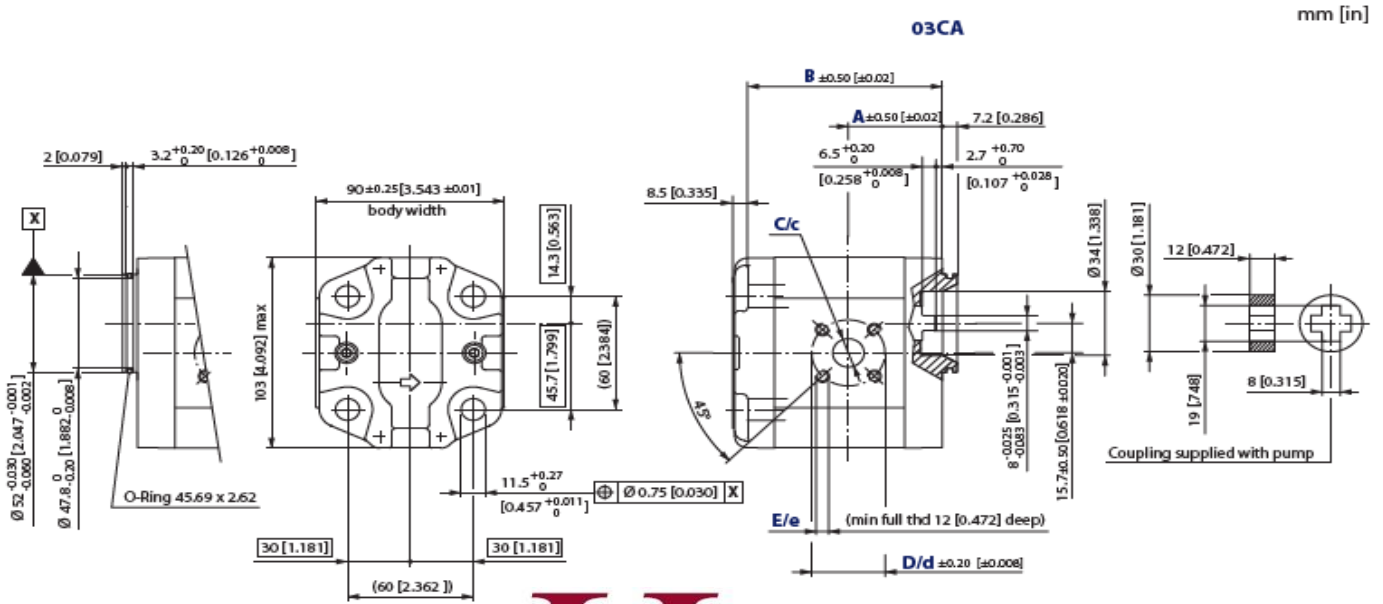
03		pilot \varnothing 52 + O-ring + 4 otvory cez telo	CA		Unašac 8x17,8xL6,5
----	-------------------------------------------------------------------------------------	-----------------------------------------------------	----	--------------------------------------------------------------------------------------	--------------------

Porty

Sanie			Výtlak		
C3		13,5x30xM6	C3		13,5x30xM6
C7		20x40xM8	C3		13,5x30xM6

Rozměry

	4,0	6,0	8,0	011	014	017	019	022	025
A	37,30	38,60	40,60	45,00	45,00	45,00	45,00	52,50	62,00
B	81,50	85,00	89,00	93,00	99,00	103,00	107,00	113,00	117,00



Hireco
TECHNIK