

SNP2NN/...02AA



SKUPINA 2

Technické dáta



		Veľkosť							
		4,0	6,0	8,0	011	014	017	019	022
Objem	ccm	3,9	6,0	8,4	10,8	14,4	16,8	19,2	22,8
Maximálny tlak	bar	280	280	280	280	280	280	230	200
Menovitý tlak		250	250	250	250	250	250	210	180
Maximálne otáčky	min-1	4000	4000	4000	4000	3500	3000	3000	3000
Hmotnosť	kg	2,30	2,40	2,50	2,70	2,90	3,00	3,10	3,20
Prietok pri 1400 ot/min	l/min	4,91	7,56	10,58	13,61	18,14	21,17	24,19	28,73
Teoretický prietok pri max otáčkach	l/min	15,60	24,00	33,60	43,20	50,40	53,40	57,60	68,40

Montážna príručka

Hriadel'


02		pilot \varnothing mm [3,15 in] German PTO, 4-bolt	AA		1:5 tapered
----	---	---	----	---	-------------

Porty

Sanie			Výtlak		
B7		20x40xM6	B5		15x35xM6

Rozměry

	4,0	6,0	8,0	011	014	017	019	022
A	43,25	45,00	45,00	49,00	52,00	52,00	56,00	59,00
B	90,00	93,50	97,50	101,50	107,50	111,50	115,50	121,50

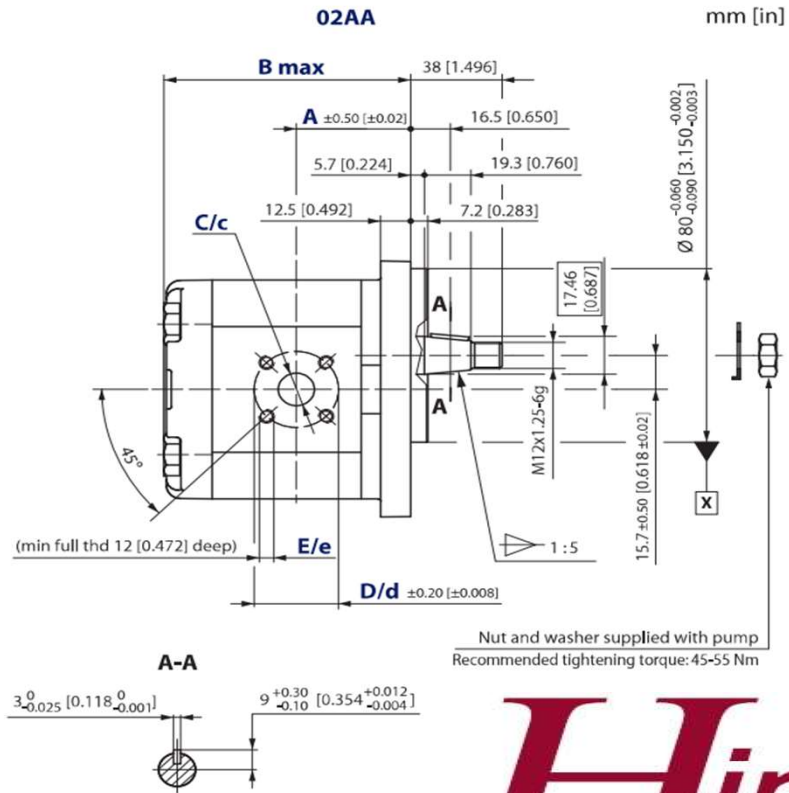

Hireco

TECHNIK